





Model NO.	Rated Torque	Rated RPM	Motor Diameter	Tube Length A	Rated voltage	Rated Power	Rated Current	IP Class
AM45-50/12	50N.m	12rpm	45mm	520mm	230V	250W	1.089A	IP44

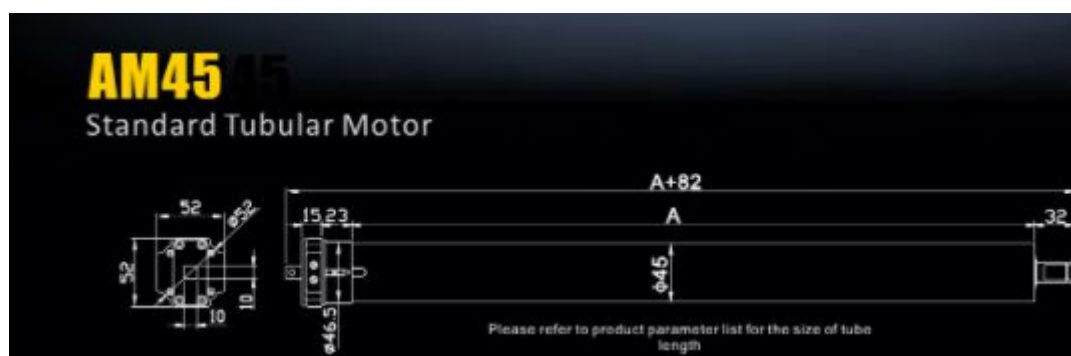

### Control via a single switch/button

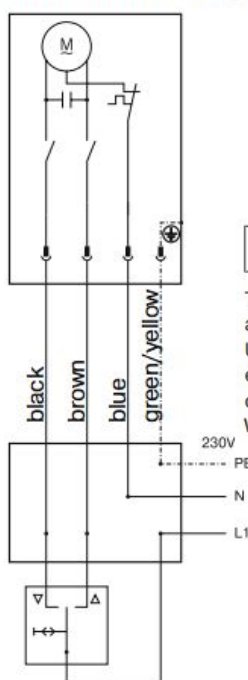

### Information for the electrician

The tubular drives with mechanical limit switching must **not** be connected in parallel. The drive manufacturer offers a range of suitable controls for the simultaneous control of several drives.

Use external conductor L1 to control the up and down direction. Other devices or consumers (lamps, relays, etc.) must not be directly connected to the drive connecting cables. For this purpose, the drives and additional devices must be decoupled by relay controls.

When installing the drive, all-pole disconnection from the mains with a contact gap of at least 3 mm per pole must be provided.

